

HM-FHSE-AP, HM-FHSE-I-AP & HM-RHSE-AP, HM-RHSE-I-AP ADDRESSABLE DETECTION

Delivering a totally new detector platform, incorporating an advanced digital protocol

The revolutionary HM Advanced range delivers a totally new detector platform that incorporates the new digital Series Advanced Protocol. The new Protocol delivers more devices on the loop and gives greater control, configurability and device management whilst enabling the overall system to be optimized to the location and use of the building with far greater flexibility than ever before.

All HM series detectors are environmentally friendly and meet the WEEE and RoHS legislative requirements, minimising end of life disposal costs, and are mechanically and electrically backwards compatible with existing devices.

The devices utilise the universal B501AP base making the installation process simple and fast.



FEATURES AND BENEFITS

- Available with or without short circuit isolation
- Worldwide proved reliability
- Aesthetic design to harmonise with the modern built environment
- Analog addressable communication
- Isolator per device allows faster, more precise fault finding
- Easy to maintain (washable filter)
- Base complements the detector and is easy to install and wire
- Dual integrated LED for 360° visibility
- Rotary decade address switches
- Enhanced smoke chamber design to reduce false alarms by dust or contamination
- Genuine and fast response
- Conforms to EN54-7
- LPCB approved
- Ivory colour to harmonise with the modern built environment
- Fast installation with rotatory addressable switches (01-159)
- Advanced protocol and smoothing filter to suppress false alarm
- Environment friendly - meets RoHS legislative requirements


HM SERIES DETECTORS DATA SHEET ADDRESSABLE DETECTION

HM-FHSE-AP, HM-FHSE-I-AP & HM-RHSE-AP, HM-RHSE-I-AP Thermal Sensors

The HM-FHSE-AP & HM-FHSE-I-AP are fixed temperature analogue addressable sensors employing low mass thermistors and microprocessor technology for fast response and linear temperature sensing. Their linear response allows these sensors to be used to signal temperatures over the range of 58°C (Class A1S).

The HM-RHSE-AP & HM-RHSE-I-AP uses the same thermistor and microprocessor technology to provide an alarm when the rate of rise in temperature exceeds 10°C/minute (typical) or if the temperature exceeds a threshold of 58°C (Response Class A1R). The detectors have two integral red LEDs that provide 360° local visual indication of the device status.

| MECHANICAL SPECIFICATION | |
|------------------------------|--------------------------------|
| HEIGHT | 61mm installed in B501AP base |
| DIAMETER | 102mm installed in B501AP base |
| WEIGHT | 88g (inc base) |
| MAX WIRE GAUGE FOR TERMINALS | 2.5mm ² |
| COLOUR | White |
| MATERIAL | PC / ABS |

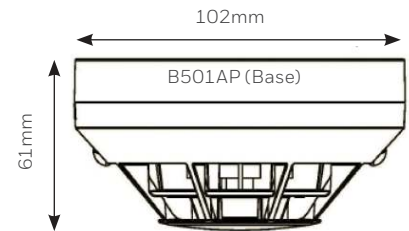

| ELECTRICAL SPECIFICATIONS - NON-ISOLATED PRODUCT (HM-FHSE-AP, HM-RHSE-AP) | |
|---|--|
| OPERATING VOLTAGE RANGE | 15 to 32Vdc |
| MAXIMUM STANDBY CURRENT | 260µA at 24Vdc (no communications) 310µA at 24Vdc (LED blink enabled, once every 5s) |
| LED CURRENT | 3.5mA at 24Vdc |
| REMOTE OUTPUT VOLTAGE | 22.5Vdc @ 24Vdc |
| REMOTE OUTPUT CURRENT | 10.8mA @ 24Vdc |
| ADDITIONAL LOOP RESISTANCE USING THE B501AP | typ 20mohm (max 30 mohm) |

| ELECTRICAL SPECIFICATIONS - ISOLATOR VERSION (ONLY FOUND IN HM-FHSE-I-AP , HM-RHSE-I-AP) | |
|--|--|
| OPERATING VOLTAGE RANGE | 15 to 28Vdc |
| MAXIMUM STANDBY CURRENT | 160µA at 24Vdc (no communications) 300µA at 24Vdc (LED blink enabled, once every 5s) |
| ISOLATION CURRENT | 15mA at 24Vdc |
| MAXIMUM CONTINUOUS CURRENT | 1A (Switch Closed) |
| ADDITIONAL LOOP RESISTANCE | typ 80 mohm @24V (max 170mohm @ 15V) |

HM SERIES DETECTORS DATA SHEET ADDRESSABLE DETECTION

ENVIRONMENTAL SPECIFICATIONS

| | |
|-------------------|--|
| TEMPERATURE RANGE | -30°C to +70°C |
| HUMIDITY | 10 to 93% relative humidity (non-condensing) |

APPROVALS

HM-RHSE-AP, HM-RHSE-I-AP: EN54-5: 2000 Class A1R (and EN54-17: 2005 for -I)
HM-FHSE-AP, HM-FHSE-I-AP: EN54-5: 2000 Class A1S (and EN54-17: 2005 for -I)
EN54-5 states that Class A1 has a maximum application temperature of 50°C, Class B has a maximum application temperature of 65°C.

For more information,

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002

www.honeywell.com

© 2020 Honeywell International Inc.

HM SERIES DETECTORS DATA SHEET
ADDRESSABLE DETECTION

Honeywell